

TELO VENTILÁTORA/

TICHÝ				TURBO			
Ø100		Ø125		Ø100		Ø125	
26 dB	75 m³/h	32 dB	145 m³/h	36 dB	110 m³/h	42 dB	215 m³/h
5 IN	26 Zbôhom	9 IN	28 Zbôhom	13 IN	40 Zbôhom	18 IN	62 Zbôhom
	m³/h		IN		Zbôhom		dB(A)
	1 2 3 4	1 2 3 4	1 2 3 4	1 2 3 4	1 2 3 4	1 2 3 4	1 2 3 4
KWT100CTR	44 77 87 110	5 8 9 13	10 26 32 40	19 tridsať	34 36		
KWT125CTR	67 100 150 215	6 9 12 18	6 13 27 62	19 26 34 42			



HLAVNÉ RYSY/ Hlavné rysy

- *Silent* **tichý chod**/tichá prevádzka
- **TURBO** vysoká účinnosť výmeny vzduchu / vysoká kapacita výmeny vzduchu
- **ABS plast**/ABS plast
- **gulčové ložiská**/gulčové ložiská
- **IPX4**
- **maximálna prevádzková teplota 40°C** / maximálna prevádzková teplota 40°C
- **možnosť inštalácie na stenu a strop*** / povolená montáž na stenu a strop*
- **Záruka 5 rokov**/5 rokov záruka
- **možnosť inštalácie spätného ventilu (ZZ)** / schopnosť použitia spätného ventilu (ZZ).

VYBAVENIE/ VYBAVENIE



EasyClip



Svorkovnica



Tahový spínač



Časovač



Senzor vlhkosti




Čas a rýchlosť guverner



pohybový senzor

ROZMERY/ ROZMERY

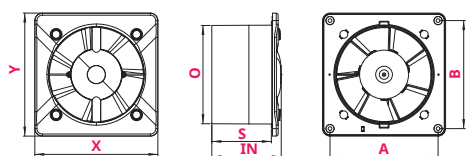

	Ø	A	B	X	Y	IN	S
Ø100	100	109	109	128	128	88	77
Ø125	125	137	137	156	156	88	77

	<i>Silent</i>	TURBO						
	INDEX	INDEX						
Ø100	KWS100	100 KWT	●					
	KWS 100W	KWT 100W		●				
	KWS100T	KWT100T			●			
	KWS100H	KWT100H			●	●		
		KWT100CTR			●		●	
	KWS100M	KWT100M			●			●
Ø125	KWS125	KWT125	●					
	KWS125W	KWT 125W		●				
	KWS125T	KWT125T			●			
	KWS125H	KWT125H			●	●		
		KWT125CTR			●		●	
	KWS125M	KWT125M			●			●



GULČKOVÉ LOŽISKÁ
Gulčkové ložiská



4 hmoždinky a skrutky