

Regulatory grills consists of two parts, which are connected by a locking screw. The air flow can be easy controled

The construction hole should be at least 40 mm smaller than grill.


To mount grills is a the most suitable use a screws and dowels.

The back of the grill is equiped fiberglass net against insects.

- Possibility to control the air flow
- Suitable in combination with a antirain grill on the outer side of wall

Material:

- Aluminium sheet thickness 0,8 mm (natural, white RAL 9016, brown RAL 8017)
- Brushed stainless steel thickness 0,8 mm
- Galvanized sheet steel thickness 1,00 mm (natural, white RAL 9016)

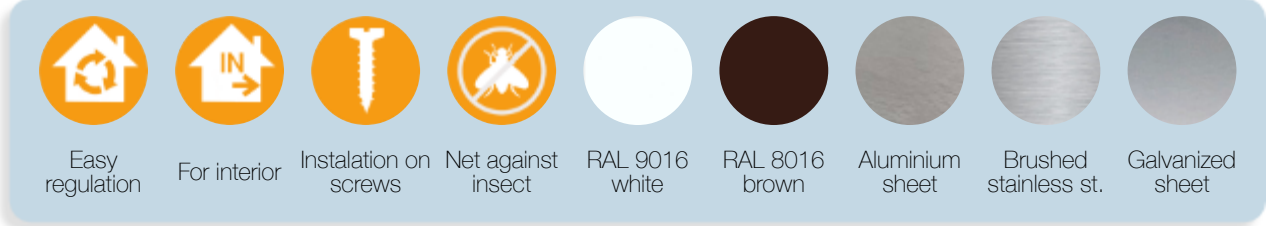

type	X	Y	A	B
190x190 mm	150	150	190	190
190x340 mm	150	300	190	340
260x80 mm	220	40	260	80
260x140 mm	220	100	260	140
260x260 mm	220	220	260	260
300x300 mm	260	260	300	300
340x190 mm	300	150	340	190
340x340 mm	300	300	340	340
400x400 mm	360	360	400	400
500x140 mm	460	100	500	140
500x260 mm	460	220	500	260

