

Ø100		Ø125		Ø150	
36 dB	90 m <sup>3</sup> /h	41 dB	150 m <sup>3</sup> /h	44 dB	215 m <sup>3</sup> /h
14 W	37 Pa	19 W	56 Pa	18 W	52 Pa




## HLAVNÉ RYSY

- /ABS plast
- /klzné ložiská
- IPX4
- / maximálna prevádzková teplota 40°C
- /2 roky záruka
- schopnosť použitia spätného ventilu (ZZ).

## / VYBAVENIE



## ROZMERY

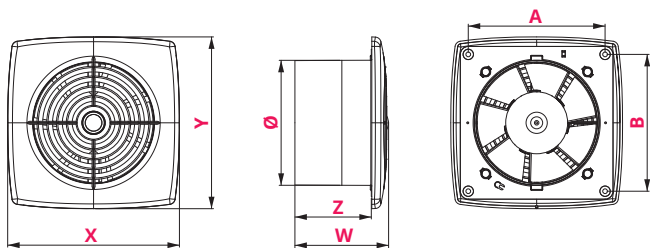

	Ø	A	B	X	Y	W	Z
Ø100	100	109	109	142	142	94	77
Ø125	125	137	137	172	172	94	77
Ø150	150	162	162	197	197	100	82,5



	INDEX				
Ø100	WR100	●			
	WR100W		●		
	WR100T			●	
	WR100H			●	●
	WR100R			●	●
Ø125	WR125	●			
	WR125W		●		
	WR125T			●	
	WR125H			●	●
	WR125R			●	●
Ø150	WR150	●			
	WR150W		●		
	WR150T			●	
	WR150H			●	●
	WR150R			●	●



4 hmoždinky a skrutky